

Sonoma LUX – 800 Disassembly Instructions




Step 1: Remove the Wine-Mate cooling unit

The Wine-Mate cooling unit is held on by two metal brackets that are bolted on to the top of the cabinet. Unplug the cooling system from the wall. Remove the two screws and carefully pull the Wine-Mate cooling unit towards you (you will need assistance since these two brackets are the only thing holding the unit). Place the cooling unit on a flat surface in the same position as it is installed in the cabinet.

**Step 2: Remove the doors**

Remove all screws from the door hinges, and then remove the doors. The cabinet doors are heavy and will require more than one person to remove.

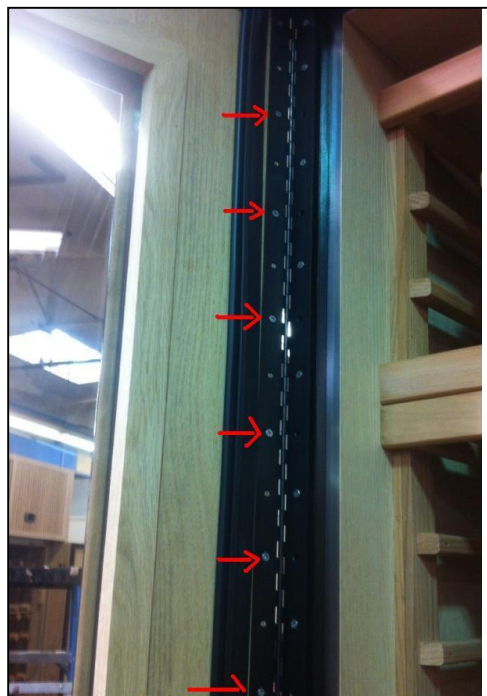

Step 3: Remove the crown

The crown is being held on by 12 to 16 screws that are located on the outer-top of the cabinet (top of crown). Remove all screws, and then remove the crown by lifting it straight up.



Step 4: Remove the racks from inside of the cabinet

Lay the cabinet down on a cushioned surface (doors facing up). The wooden racks are held on to the cabinet by screws that are located at the inter-back part of the cabinet. Find and remove all screws holding the racks in place and remove the racks. Keep the cabinet laid down for step 5.



Step 5: Remove the base

Remove the bolts located under the cabinet base that hold the base in place with the body of the cabinet.

Step 6: Disassemble the cabinet walls

Lay the cabinet down on a cushioned surface with the door openings facing down (opposite side from step 4). With the crown and base removed, notice the bolts along the sides in the back of the cabinet. Also notice the bolts long the sides of the bottom of the cabinet. These bolts hold the walls of the cabinet together. Remove these bolts to complete the disassembly.

