Assembly instructions for 6ft IBF-COL Module. IBF-Col-6. I

Fasteners.

Tools needed:

- (1) Hammer
- (1) Power drill
- (1) Level
- *Suggested 18 guage Brad Gun with 11/4" brad nails will make install easier.




(28) naıls Parts (8) 21/2" Phillips List: screws for attaching to wall. (3) 1/4" Joining Screws to attach to other modules.






Assembly instructions for 6ft IBF-COL Module. Racking.

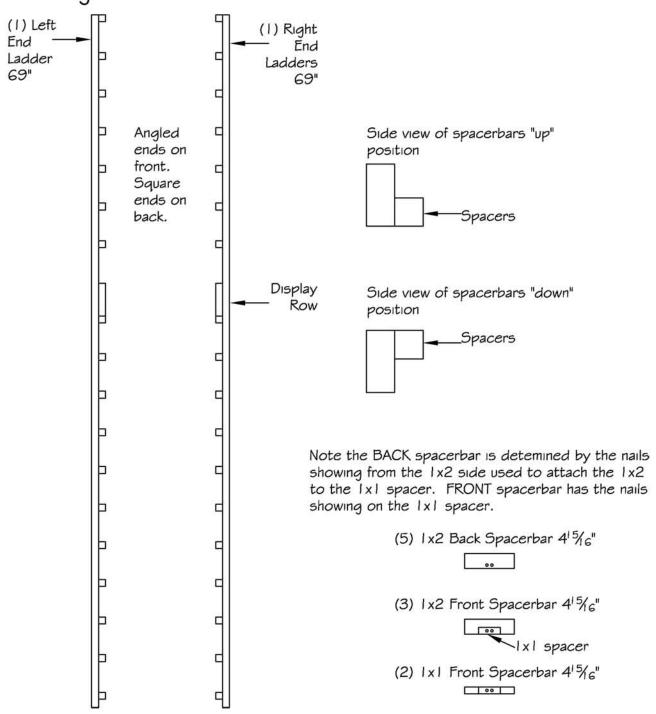


step 1




Step 1: (Attaching back spacerbars) Place the right and left end ladders on the floor, making sure the angled rails are facing the floor. On the 1st, 7th, 11th, 16th and 18th rungs, nail the end ladders to a spacerbar. The spacerbars need to be "up" so that the small block of wood is towards the bottom.

step 3 Finish



step 2



Step 2: (Attaching 1x2 \$ 1x1 front spacerbars)
Stand rack up. Starting from the bottom, place a 1x2 spacerbar on the 1st,
I I th and 18th rungs, and a 1x1 spacerbar at the 7th and 16th rung. Place
one nail into each ladder to secure into place. All but the bottom spacerbar needs to be "up" so that the small block of wood is towards the floor.

Step 3: (Finish)

Fasten to the wall through the back supports using the 2½" screws and using a level to make sure the rack is mounted square on the wall.

