

# Vinotemp®

## VT-27 TS/VT-34 TS: REPLACING THE RELAY & OVERLOAD

The electronic components that you will be receiving are simple plug in and plug out parts.

**Be sure to have the unit *unplugged* while performing the installation.**

TOOLS REQUIRED: flat-head screwdriver.

You may need to lay on your side to have easier access to the components

### INSTRUCTIONS:



The components are situated under the black plastic casing held in place by a metal band located at the rear of the unit towards the bottom.


Unhook the metal band and slide the casing off to the left to reveal the components. Take note of how they are mounted and wired in.




Pegs without components

With a flat-head screwdriver, wedge the components off the pegs on the side of the compressor (big black motor). Set the old components aside.


**IMPORTANT: DO NOT MIX OLD PARTS WITH NEW PARTS**

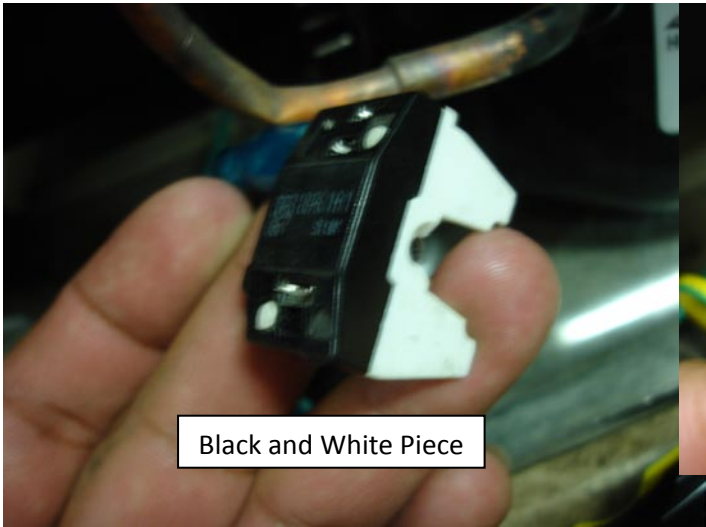


Black and White Piece

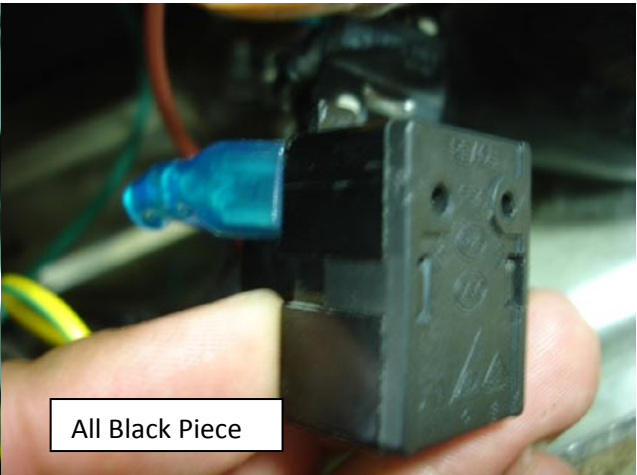

All Black Piece

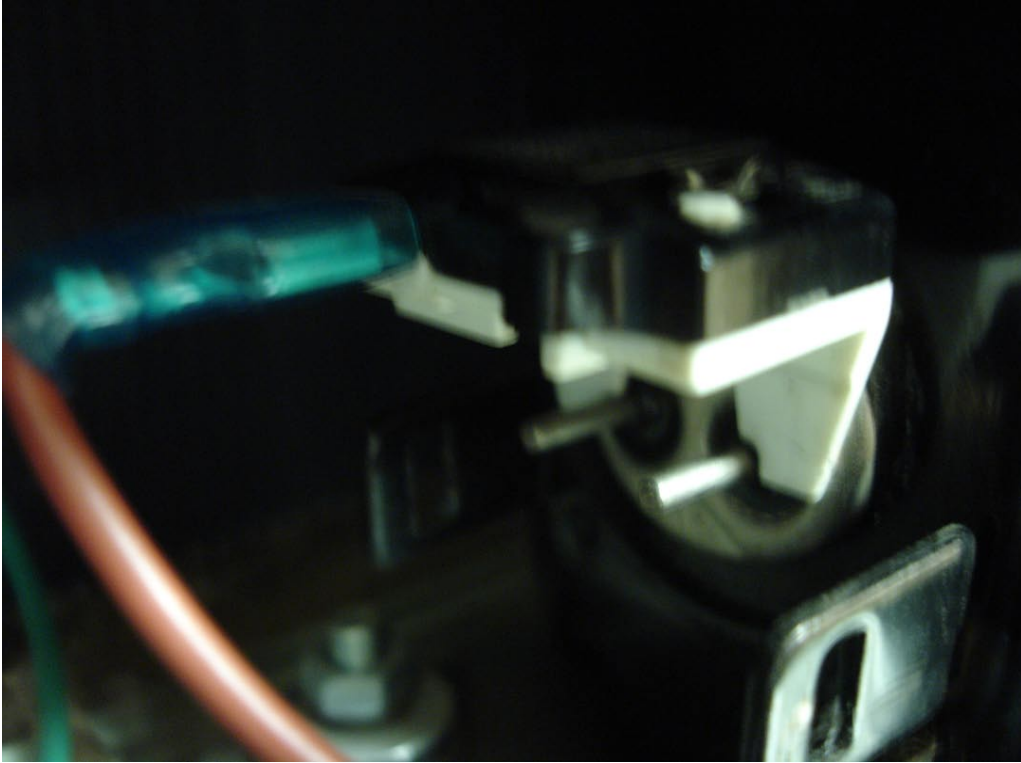

First, mount the black and white piece to the upper single peg.

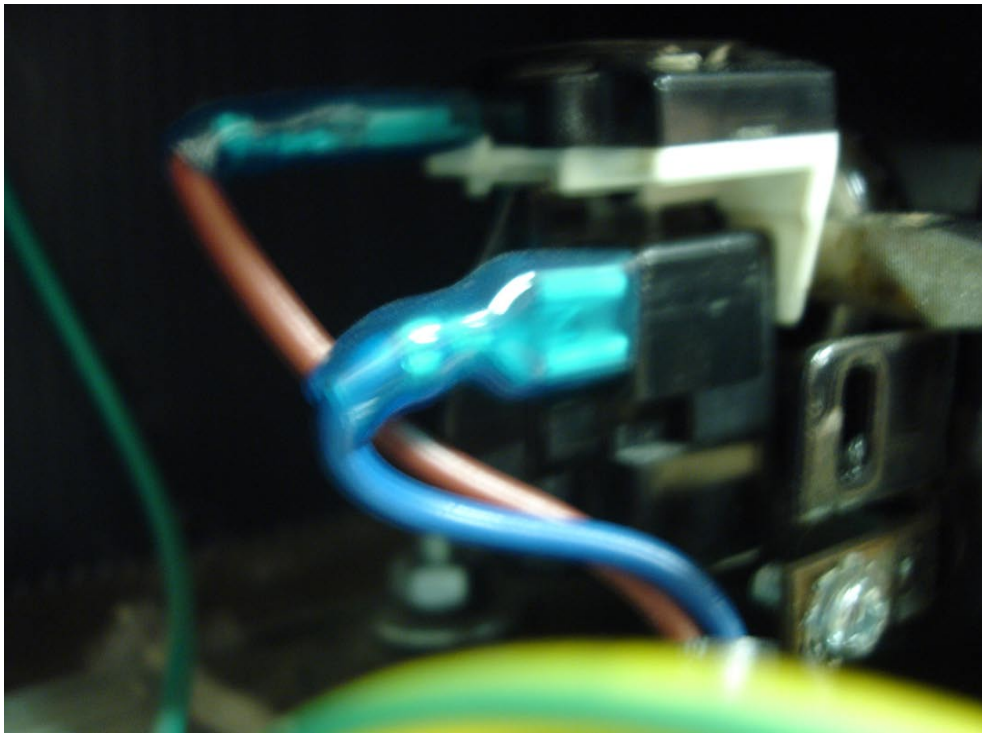

Next, mount the all black piece underneath it onto the two lower pegs.

Finally, connect the colored wires accordingly:

- **The BLACK/WHITE PIECE MOUNTS ON THE UPPER SINGLE PEG AND CONNECTS TO THE RED WIRE.**
- **THE ALL BLACK PIECE MOUNTS ON THE TWO LOWER PEGS AND CONNECTS TO THE BLUE WIRE.**

Once you have completed these installation instructions, plug the unit back into its designated electrical outlet.

Allow the unit to run its course before you attempt to put the casing back on.

### **Questions?**

Contact Vinotemp customer service at 1-800-777-8466 or [info@vinotemp.com](mailto:info@vinotemp.com).