

Assembly instructions for 7ft IBF 3 col. Module. Fasteners.

IBF3col-7

#### Tools needed:


- (1) Hammer
- (1) Power drill
- (1) Level
- \*Suggested 18 guage Brad Gun with 11/4" brad nails will make install easier.

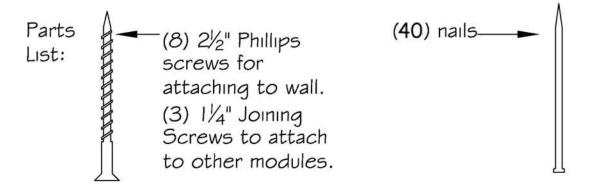

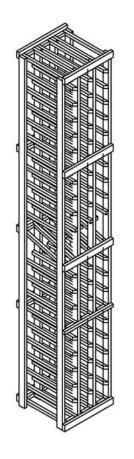




# Assembly instructions for 7ft IBF 3 col. Module. Racking. IBF3col-7

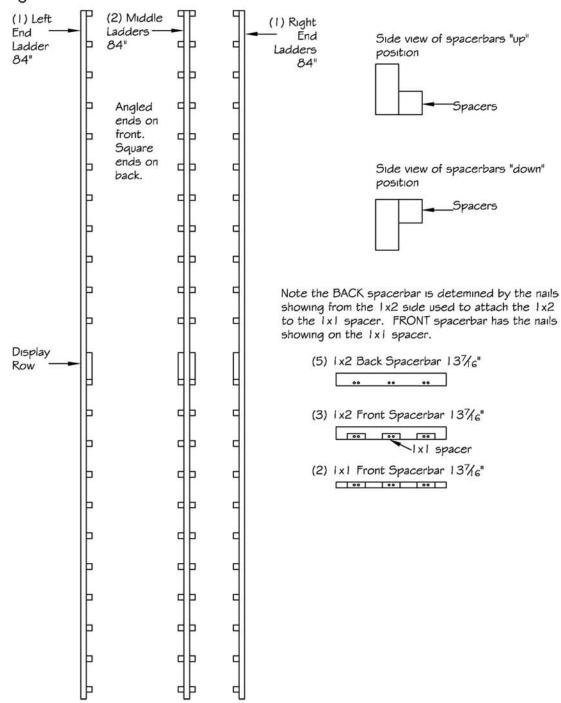


## step 1

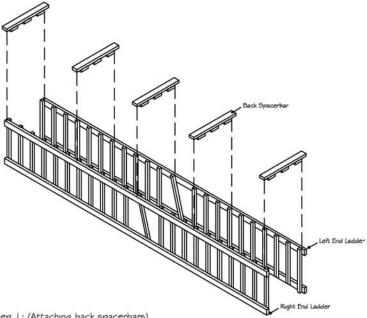


Step 1: (Attaching back spacerbars)
Place the right and left end ladders on the floor, making sure the angled rails are facing the floor. On the 1st, 7th, 11th, 16th and 22nd rungs, nail the end ladders to a 1x2 BACK spacerbar. The spacerbars need to be "up" so that the small block of wood is towards the bottom.

### step 3

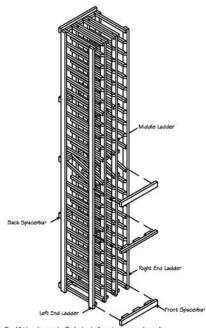


Step 3: (Attaching 1x2 \$ 1x1 front spacerbars)
Starting from the bottom, place a 1x2 spacerbar on the 1st and 11th rungs, and a IxI spacerbar at the 7th rung. Place one nail into each ladder to secure into place. All but the bottom spacerbar needs to be up so that the small block of wood is towards the floor.

### step 2

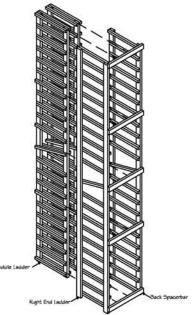


Step 2: (Attaching middle ladders to back spacerbars)
Stand up the rack. Insert the 5 middle ladders into the slots of the spacer bar as shown. Nail each middle ladder onto the spacer bars as shown with the nails provided.

#### step 4

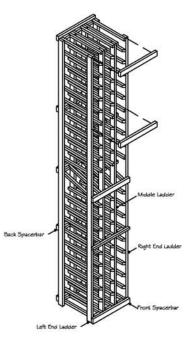

Step 4: (Attaching  $|x| \le |x|$  front spacerbars cont.) Starting from the bottom, place a |x| spacerbar on the |6th rung, and a |x|2 spacerbar at the 22nd rung. Place one nail into each ladder to secure into place. All the spacerbars need to be up so that the small block of wood is towards the floor.

# Step 5 Finish

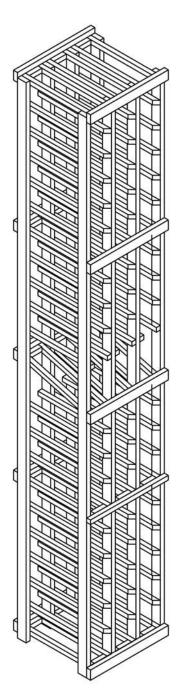

Step 5: (Finish)

Fasten to the wall through the back spacerbar using the 2½" screws and using a level to make sure the rack is mounted square on the wall.

